

AS Series PRODUCTS




AS-5 Datasheet

Electro acoustic specifications

Type	Passive wide-range speaker
Design	Bass-reflex
Driver	coaxial 5" woofer + 1" compression (ferrite)
Frequency response	80 - 20 KHz
Efficiency 1W/1m	91 dB SPL
Nominal impedance	8 Ohm
Dispersion	Conical 90°@2KHz ; 70°@10KHz
Power rating AES ; peak	100 W ; 400 W
Amp. power required	200 à 400 W
Maximum level @ 1m	117 dB SPL max

Product dimensions

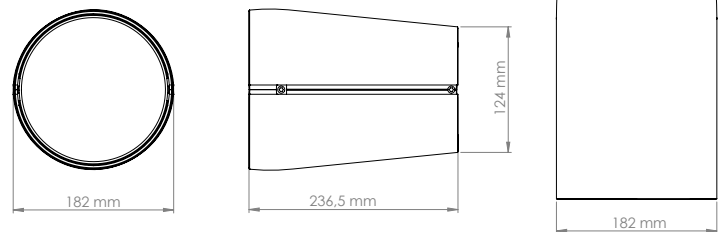

Product characteristics

Enclosure	Cast aluminum
Finishes	Standard/custom painting color *
Front	Removable. 15 colored* acoustic cloth on perforated metal sheet.
Connexions	4-pin 2 speakon connectors
Weight	4,5 Kg net ; 4,8 Kg shipping
Shipping dimensions	200.200.250 mm

* See: AS Series - Finishes

Options and accessories

Integration	3 lines of mounting solutions* : Masts - Suspensions - Tubes
Subwoofer	AS-S10
Xover frequency	110-140 Hz

* See :
AS Series - Integration
AS Series - Integration service manual

Frequency response

