

# AS Series PRODUCTS



FRENCHFLAIR  
AUDIO

## AS-8 Datasheet

### Electro acoustic specifications

Type	2 way wideband passive speaker
Design	Bass-reflex
Driver	coaxial 8" woofer + 1.5" compression (neodymium)
Frequency response	70 - 20 KHz
Efficiency 1W/1m	95 dB SPL
Nominal impedance	8 Ohm
Dispersion	Conical 100°@2KHz ; 90°@8KHz
Power rating AES ; peak	250 W ; 1000 W
Amp. power required	400 to 600 W
Maximum level @ 1m	125 dB SPL max

### Product characteristics

Enclosure	Cast aluminum
Finishes	Standard/custom painting color *
Front	Removable. 17 colored* acoustic cloth on perforated metal sheet.
Connexions	2x 4-pin speakon connectors
Weight	4,5 Kg net ; 4,8 Kg shipping
Shipping dimensions	410x380x280 mm


\* See: AS Series - Finishes

### Options and accessories

Integration	U bracket (aluminum)
Subwoofer	AS-S10 / AS-S24
Xover frequency	80-110 Hz

\* See :  
AS Series - Integration  
AS Series - Integration service manual

### Product dimensions

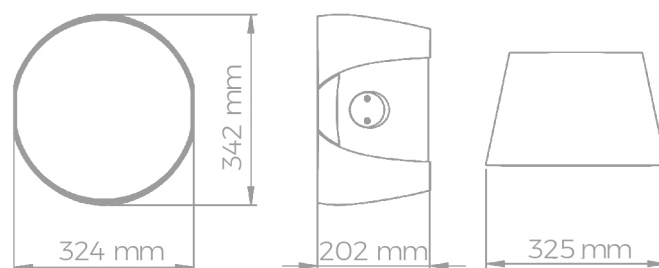

### Frequency response

