

AS Series PRODUCTS



FRENCHFLAIR
AUDIO

AS-5 Datasheet

Electro acoustic specifications

Type	Passive wide-range speaker
Design	Bass-reflex
Driver	coaxial 5" woofer + 1" compression (ferrite)
Frequency response	80 - 20 KHz
Efficiency 1W/1m	91 dB SPL
Nominal impedance	8 Ohm
Dispersion	Conical 90°@2KHz ; 70°@10KHz
Power rating AES ; peak	100 W ; 400 W
Amp. power required	200 to 400 W
Maximum level @ 1m	117 dB SPL max

Product characteristics

Enclosure	Cast aluminum
Finishes	Standard/custom painting color *
Front	Removable. 17 colored* acoustic cloth on perforated metal sheet.
Connexions	2x 4-pin speakon connectors
Weight	4,5 Kg net ; 4,8 Kg shipping
Shipping dimensions	510x310x310 mm (by pair)


* See: AS Series - Finishes

Options and accessories

Integration	4 lines of mounting solutions* : Masts - Suspensions - Tubes - Brackets
Subwoofer	AS-S10 / AS-S24
Xover frequency	110-140 Hz

* See :
AS Series - Integration
AS Series - Integration service manual

Product dimensions

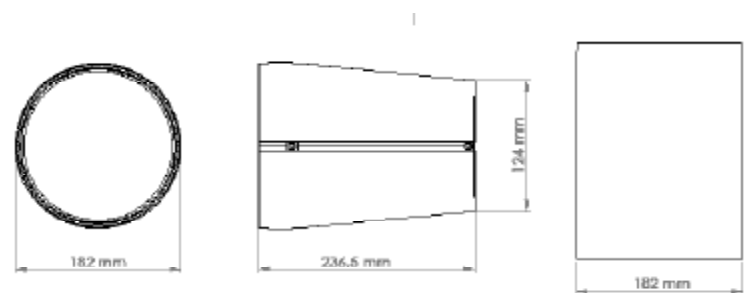

Frequency response

