

# AS Series PRODUCTS



FRENCHFLAIR  
AUDIO

**AS-3**

## Datasheet

### Electro acoustic specifications

Type	Passive wide-range speaker
Design	Bass-reflex
Driver	neodymium 3,3"
Frequency response	120 - 20 KHz
Efficiency 1W/1m	87 dB SPL
Nominal impedance	8 Ohm
Dispersion	Conical 90°@4kHz ; 60°@10KHz
Power rating AES ; peak	30 W ; 120 W
Amp. power required	60 à 120 W
Maximum level @ 1m	107 dB SPL max

### Product characteristics

Enclosure	Cast Aluminum
Finishes	Standard/custom painting color *
Front	Removable. 20 colored* acoustic cloth on perforated metal sheet.
Connexions	Phoenix Contact 1-2 IN/3-4 OUT
Weight	1,5 Kg net ; 1,8 Kg shipping
Shipping dimensions	220x220x220 mm


\* See: AS Series - Finishes

### Options and accessories

100 V Line (AS-3 100)	5/10/20 W Transformer
Weight	2,3 Kg net ; 2,6 Kg shipping
Rigging options	4 lines of mounting solutions* : Masts - Suspensions - Tubes - Brackets
Subwoofer	AS-S10
Xover frequency	110-140 Hz

\* See :  
AS Series - Integration  
AS Series - Integration service manual

### Product dimensions

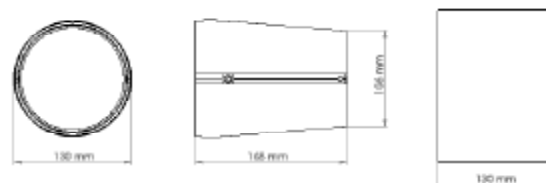

### Frequency response

