

# AS Series

## - Speakers -

### AS-5 Datasheet

#### Reference:


FF/AS5/A9011Cxx

FF/AS5/A9016Cxx

#### Electro acoustic specifications

Type	Passive wide-range speaker
Charge	Bass-reflex
Driver	5" coaxial woofer + 1" compression (ferrite)
Frequency response	80 - 20 kHz
Efficiency 1W/1m	91 dB SPL
Nominal Impedance	8 Ohms
Dispersion	Conical 90°@ 2kHz ; 70°@10 kHz
Power rating AES ; Peak	100 W ; 400 W
Amp. power required	200 to 400 W
Maximum level @ 1m	117 dB SPL max


#### Frequency response

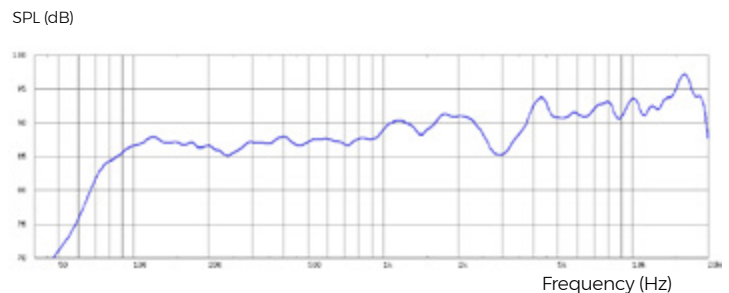

#### Product characteristics

Enclosure	Cast aluminum
Paint	Powder coated fine textured
Front	Removable. Acoustic cloth on perforated aluminum sheet
Connexion	2 x Speakon NL4
Dimensions	182 x 182 x 236.5 mm
Net weight	4.5 kg
Shipping dimensions	320 x 280 x 220 mm
Gross weight	5 kg

#### Product dimensions

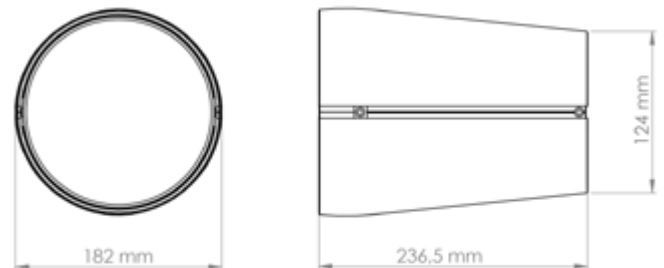

#### Finishes and accessories

Color	Standard Black RAL 9011 Standard White RAL 9016 Option : Any RALs
Grille	Standard 20 choices of grille cloth colors.
Rigging systems	Mast, Suspensions, Tubes, Brackets
Subwoofer	AS-S10

