

# AS Series

## - Speakers -



### AS-8 Datasheet

#### Reference:


FF/AS8/A9011Cxx

FF/AS8/A9016Cxx

#### Electro acoustic specifications

Type	2 way wideband passive speaker
Design	Bass-reflex
Driver	Coaxial 8" woofer + 1.5" compression (neodymium)
Frequency response	70 - 20 kHz (+/- 6dB)
Efficiency 1W/1m	94 dB SPL
Nominal impedance	8 Ohms
Dispersion	Conical 100°@ 2kHz ; 90°@ 8 kHz
Power rating AES ; Peak	250 W ; 1 000 W
Amp. power required	400 to 600 W
Maximum level @ 1m	124 dB SPL max


#### Frequency response

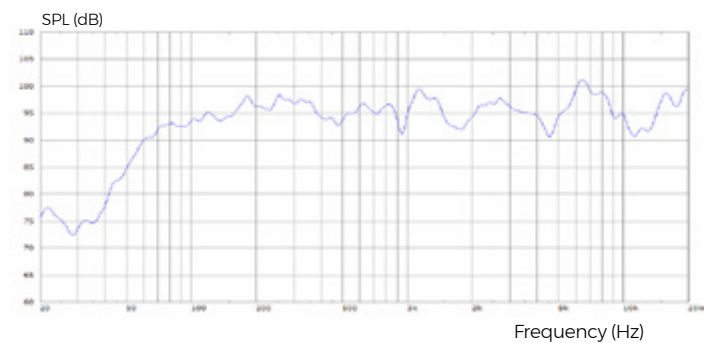

#### Product characteristics

Enclosure	Cast aluminum
Paint	Powder coated fine textured
Front	Removable. Acoustic cloth on perforated aluminum sheet
Connexions	2 x Speakon NL4
Dimensions	342 x 327 x 203 mm
Net weight	8.9 kg
Shipping dimensions	380 x 365 x 270 mm
Gross weight	9.6 kg

#### Product dimensions

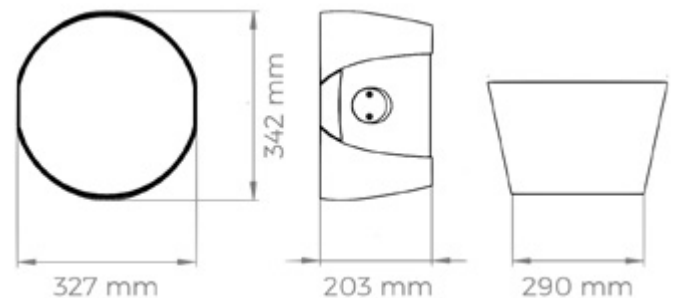

#### Finishes and accessories

Color	Standard Black RAL 9011 Standard White RAL 9016 Option : Any RALs
Grille	Standard 20 choices of grille cloth colors
Rigging system	Bracket
Subwoofers	AS-S10 / AS-S24

