

AS Series

- Speakers -

AS-S10 Datasheet

Reference:


FF/ASS10/A9011Cxx

FF/ASS10/A9016Cxx

Electro acoustic specifications

Type	Passive subwoofer
Design	Bass-reflex
Driver	High-excursion neodymium 10"
Frequency response	45 - 250 kHz
Efficiency 1W/1m	96 dB SPL
Nominal impedance	8 Ohms
Dispersion	Omnidirectional
Power rating AES ; Peak	400 W ; 1 600 W
Amp. mpower required	800 to 1 600 W
Maximum level @1m	126 dB SPL max


Frequency response

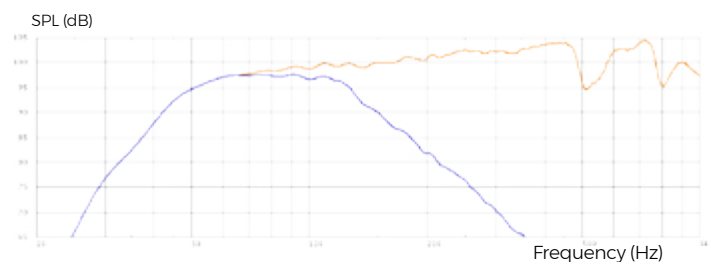

Product characteristics

Enclosure	Multiply Birchwood
Paint	Lacquer
Front	Removable. Acoustic cloth on perforated aluminum sheet.
Connexions	2 x Speakon NL4
Dimensions	500 x 380 x 300 mm
Net weight	13.7 kg
Shipping dimensions	600 x 485 x 400 mm
Gross weight	16.5 kg

Product dimensions

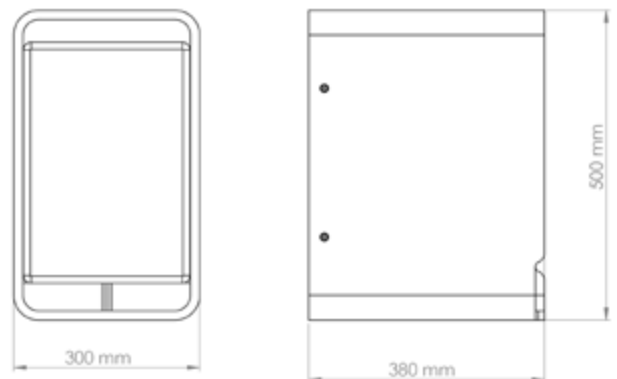

Finishes and accessories

Color	Standard Black RAL 9011 Standard White RAL 9016
Grille	Standard 20 choices of grille cloth colors

