

# AS Series

## - Speakers -


### AS-S24 Datasheet

Reference:  
FF/ASS24/A9011  
FF/ASS24/A9016

#### Electro acoustic specifications

Type	Passive subwoofer
Driver	Semi horn-loaded bass-reflex
Driver	2x high-excursion (neodymium)12"
Frequency response	40 - 250 kHz
Efficiency 1W/1m	100 dB SPL
Nominal impedance	4 Ohms
Dispersion	Omnidirectional
Power rating AES ; Peak	900 W ; 3 000 W
Amp. power required	1 500 to 3 000 W
Maximum level @ 1m	132 dB SPL max


#### Frequency response

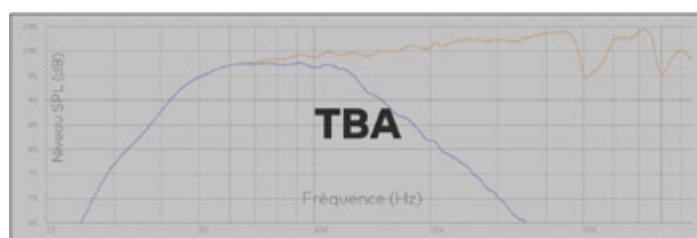

#### Product characteristics

Enclosure	Multiply Birchwood
Paint	Textured lacquer
Front	Removable. Aluminum perforated grille with acoustic foam
Connexion	2 x Speakon NL4
Dimensions	790 x 500 x 335 mm
Net weight	35 kg
Shipping dimensions	1 000 x 700 x 500 mm
Gross weight	38 kg

#### Product dimensions

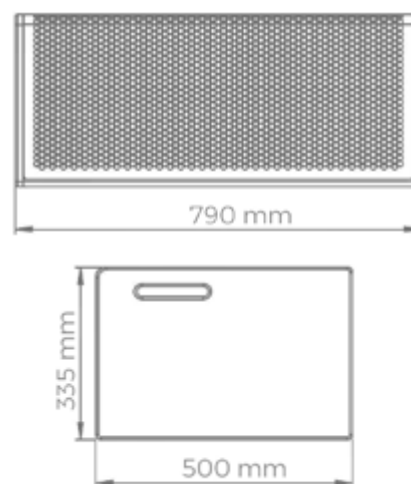

#### Finishes and accessories

Color	Standard Black RAL 9011 Standard White RAL 9016
Grille	Standard Black RAL 9011 Standard White RAL 9016

