

# AS Series

## - Speakers -



### AS-3 Datasheet

#### Reference:


FF/AS3/A9011Cxx

FF/AS3/A9016Cxx

#### Electro acoustic specifications

Type	Passive wide-range speaker
Design	Bass-reflex
Driver	Neodymium 3.3"
Frequency response	120 - 20 kHz
Efficiency 1W/1m	87 dB SPL
Nominal impedance	8 Ohms ( 100 V option)
Dispersion	Conical 90°@ 4kHz ; 60°@10 kHz
Power rating AES; Peak	30 W ; 120 W
Amp. power required	60 to 120 W
Maximul level @ 1m	107 dB SPL max


#### Frequency response

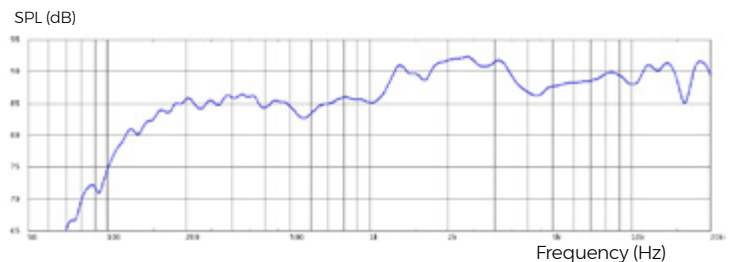

#### Product characteristics

Enclosure	Cast aluminum
Paint	Powder coated fine textured
Front	Removable. Acoustic cloth on perforated aluminum sheet
Connexion	Euroblock contact 1-2 IN/3-4 OUT
Dimensions	130 x 130 x 168 mm
Net weight AS-3/AS-3 100V	1.5 kg / 1.9 kg
Shipping dimensions	220 x 220 x 220 mm
Gross weight AS-3 / AS-3 100V	1.8 kg / 2.2 kg

#### Product dimensions

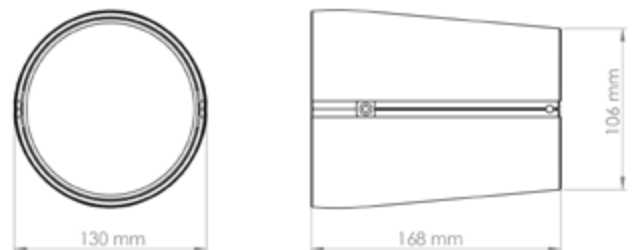

#### Finishes and accessories

Color	Standard Black RAL 9011 Standard White RAL 9016 Option : Any RALs
Grille	Standard 20 choices of grille cloth colors.
Rigging systems	Mast, Suspensions, Tubes, Brackets
Subwoofer	AS-S10

